



KING'S

*The Logical Choice*

**PIONEERING  
COMFORT AND  
DURABILITY  
SINCE 1965**



**King's Safety Footwear: Tough Outside, Soft Inside.**

A Legacy of Safety Footwear Excellence, Delivering a Heritage of Innovation, Ultra Comfort and Durable Performance.



# ELEVATING FOOTWEAR EXCELLENCE SINCE 1965

For over 55 years, King's has been manufacturing comfortable safety footwear with superior performance quality for rugged, industrial environments, providing protection against a variety of work hazards. Engineered to withstand tough conditions with a durable exterior and designed with a soft interior for lasting comfort throughout the workday, King's has redefined the standards for footwear innovation.

## FOOTWEAR FEATURES

Sole Features	Comfort Features	Special Features
<div><p>Puncture Resistant</p></div> <div>Pierce-resistant steel midsole reduces the risk of sharp objects penetrating the sole and entering the foot.</div>	<div><p>Wide Profile Toecap</p></div> <div>King's signature wide profile safety toecap offers maximum comfort for your toes.</div>	<div><p>2.0-2.2mm Full Grain Leather</p></div> <div>Tough 2.0 - 2.2 mm thick full-grain leather upper with good breathability.</div>
<div><p>Anti-Static</p></div> <div>Anti-static soles control the build-up of static electricity on its wearer to reduce the potential hazards associated with static discharge.</div>	<div><p>Breathable Lining</p></div> <div>Highly breathable 3-D lining minimises abrasion when in contact with skin, allowing your feet to remain insulated while drawing excess moisture from the foot.</div>	<div><p>Water Resistant Leather</p></div> <div>Helps keep feet dry as it repels water on the surface of footwear.</div>
<div><p>ESD</p></div> <div>ESD (Electrostatic Discharge) certified footwear provides the necessary grounding to control static. ESD footwear is engineered to prevent sudden static flows between electrically charged objects caused by contact, and thus protect against potential ESD hazards.</div>	<div><p>Comfort Footbed</p></div> <div>Enhanced footbed for greater comfort and heel support, with highly breathable perforated channels that dry faster and promote foot freshness.</div>	<div><p>Wear-off Indicator</p></div> <div>Wear-off indicator provides an early warning on sole wear and its potential loss of grip to gauge for a replacement.</div>
<div><p>Slip Resistant</p></div> <div>A slip-resistant sole design ensures superior traction and heightened stability. For additional slip resistance (SR) testing under EN ISO 20345:2022, a ceramic tile is treated with a lubricant of glycerine.</div>	<div><p>Impact Absorption</p></div> <div>Ergonomic cushioning design to provide ultimate comfort that greatly reduces foot, leg and back fatigue when walking on hard surfaces.</div>	<div><p>Toe Bumper</p></div> <div>Protects the toe of footwear from scuffing and marking when scraped along rough surfaces.</div>
<div><p>Self-Cleaning Sole</p></div> <div>Improved technical outsole optimises fluid evacuation and provides greater bending flexibility.</div>	<div><p>Lightweight</p></div> <div>Superior lightweight design to provide enhanced comfort for long hours of wear.</div>	<div><p>Heel Guard</p></div> <div>Offers stability and impact protection in demanding environments.</div>
<div><p>Mineral Oils Resistant</p></div> <div>Enhanced protection to resist contact with acidity and other corrosive mineral substances.</div>	<div><p>Steel or Composite Safety Toecap</p></div> <div>Offers protection against falling objects or compression. Developed to withstand an impact of 200 joules.</div>	<div><p>Non-Metallic Perforation-Resistant Insert</p></div> <div>Reduces the risk of sharp objects penetrating the sole and into the foot.</div>
<div><p>Organic Oils &amp; Fats Resistant</p></div> <div>Enhanced protection to resist contact with natural oils and fats.</div>	<div><p>Driver Centric Stabiliser</p></div> <div>Unique stabiliser supports drivers' foot positioning, ensuring an optimised stance that promotes optimal comfort and stability.</div>	




## KING'S 5-TOE TECHNOLOGY

The King's wide profile toecap provides extra comfort for your forefoot and toes, while providing ample room for movement. This, in turn, allows your toes to splay easily, offering a heightened sense of balance and greater stability.



King's Wide Profile Toecap

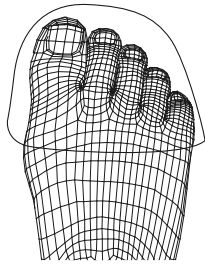

Conventional Toecap

## INSOLE TECHNOLOGY

The King's Comfort Footbed features superior shock absorption technology, offering enhanced cushioning for greater foot comfort and maximum heel support.

Perforated channels on the sole promote better breathability, enabling the sole to dry quickly and maintaining foot freshness throughout the day.





# KING'S KWD RANGE

## SOLE TECHNOLOGY



## A CLOSER LOOK AT EN ISO 20345:2022

SR (EN ISO 20345:2022)



The introduction of the EN ISO 20345:2022 standard in 2022 marked an advancement in safety footwear standards. Replacing the EN ISO 20345:2011, this new framework not only modified existing criteria, but also introduced fresh requirements, setting a higher benchmark for safety footwear.

One notable improvement lies in slip resistance evaluation. Slip resistance assessment is now mandatory in EN ISO 20345:2022, with the SRA, SRB and SRC marks being abolished. The basic slip resistance test mirrors the previous SRA test, which was conducted on a ceramic tile coated with soap solution.

An additional and more stringent test, denoted by "SR" on the certificate, may be conducted, involving the application of a lubricant of glycerine on a ceramic tile. While this test is optional, it is a prerequisite for obtaining the SR marking. This modification streamlines the certification process by integrating slip resistance as a core criterion and with a higher passing criteria.

Conforming to EN ISO 20345:2022 standards, the King's KWD Range and KWX Range meet the basic slip resistance requirements and demonstrate compliance with the additional, more stringent SR testing.

SR (EN ISO 20345:2022)



SR compliance for improved slip resistance with EN ISO 20345:2022



Outsole design engineered to complement the natural biomechanics of the walking gait



Tread with deeper grip patterns and enhanced grip variations offers superior traction



Wear-off indicators provide an early warning on sole wear and potential loss of grip



Enhanced outsole surface maximizes ground contact to optimize stability







# KING'S KWD RANGE

## SOLE TECHNOLOGY



Embrace enhanced stability and fatigue-free strides with King's expertly designed outsoles that align seamlessly with natural walking biomechanics.

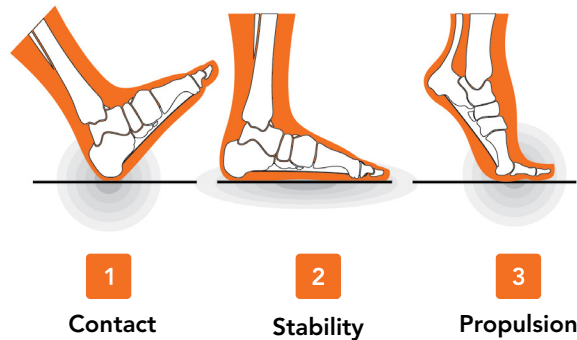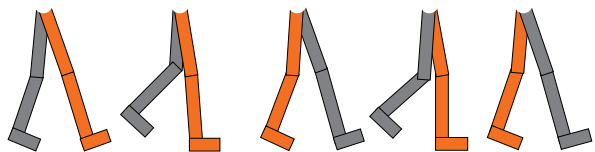

1 CONTACT	2 STABILITY	3 PROPULSION
Contact of the heel with the ground	Transferral of body weight forward	Impulse to the next step


From the controlled initial contact with the ground, supporting the crucial midstance phase of walking to promote stability, and progressing to provide the necessary propulsion for a confident push-off to the next step, the KWD Range is designed to support fatigue-free strides.

# KING'S KWD RANGE

## SHOCK ABSORPTION TECHNOLOGY



Explore the ultimate in support for diverse foot arch profiles with King's Stability Torsion Zone, helping to prevent feet pronation and supination, ensuring optimal stability and comfort.

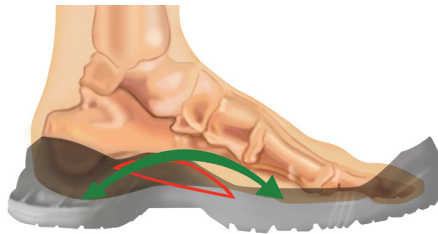

The King's KWD Range has been engineered with exceptional shock absorption technology to provide enhanced comfort and help reduce feet fatigue even during the most demanding tasks. Discover the difference in comfort with specialised air cushioning that cradles your feet. Enhanced outsole thickness delivers exceptional cushioning, making every step a breeze.





# KING'S KWD RANGE

## DUAL DENSITY POLYURETHANE FOOTWEAR

SR(ENISO20345:2022)



Padded ankle collar

Improved visibility in low-light environments with orange hued shoelaces

Higher gusseted tongue minimises water and debris penetration into the shoes

Non-woven vamp lining

Tough yet breathable 2.0 – 2.2mm full-grain leather upper

Steel toe cap conforming to EN ISO 20345:2022

Enhanced toe bumper for added shoe front protection

Strong leather upper and sole bond

Enhanced outsole thickness for exceptional cushioning and comfort

Stability Torsion Zone supports diverse foot arch profiles

King's Comfort Footbed enhances natural airflow


Reinforced stitching

Reflective strip increases visibility in low-light environments


Highly breathable 3-D lining

Specialised air cushioning for exceptional shock absorption







2.0-2.2mm Full Grain Leather




Puncture Resistant




Anti-Static




Slip Resistant




Mineral Oils & Fats Resistant




Organic Oils & Fats Resistant




Steel Safety Toecap




Wide Profile Toecap




Breathable Lining




Comfort Footbed




Impact Absorption




Lightweight



Wear-off Indicator



Toe Bumper



Strong Bonding


# KING'S KWD RANGE

### KWS200

Low-cut Lace Safety Shoe

Size  
UK 3-13 | US 4-14 | EU 36-48

Colour:  
Black




- Higher gusseted tongue minimises water and debris penetration into the shoes.
- Padded ankle collar provides superior ankle comfort, support, and chafing prevention.
- Recommended for: Construction, Mining, Manufacturing, General Industries, Utilities, Transportation, Logistics.
- Available without steel midsole in style KWS200X.

### KWD207

Slip-on Safety Shoe

Size  
UK 3-13 | US 4-14 | EU 36-48

Colour:  
Black




- Low-cut slip-on and elastic gussets for easy donning and doffing.
- Padded ankle collar provides superior ankle comfort, support, and chafing prevention..
- Recommended for: Mining, Manufacturing, General Industries, Utilities, Transportation, Logistics.
- Available without steel midsole in style KWD207X.

### KWD301

Mid-cut Lace Safety Boot

Size  
UK 3-13 | US 4-14 | EU 36-48

Colour:  
Black Brown




- Higher gusseted tongue minimises water and debris penetration into the shoes
- Padded ankle collar provides superior ankle comfort, support, and chafing prevention.
- Recommended for: Construction, Mining, Manufacturing, Light Industries, Utilities, Transportation, Logistics.
- Available without steel midsole in style KWD301X (Black) and KWD301KX (Brown).

### KWD106

Chelsea Safety Boot

Size  
UK 3-13 | US 4-14 | EU 36-48

Colour:  
Black




- Elastic-sided boot with back pull-up strap for easy donning and doffing.
- Padded ankle collar provides superior ankle comfort, support, and chafing prevention.
- Recommended for: Mining, Manufacturing, General Industries, Utilities, Transportation, Logistics.
- Available without steel midsole in style KWD106X.

### KWD206

Zipper Safety Boot

Size  
UK 3-13 | US 4-14 | EU 36-48

Colour:  
Black




- Convenient, quick release side zip for easy donning and doffing.
- Padded ankle collar provides superior ankle comfort, support, and chafing prevention.
- Recommended for: Construction, Mining, Manufacturing, Heavy and General Industries, Utilities, Oil and Gas.
- Available without steel midsole in style KWD206X.

### KWD205

Rigger Safety Boot

Size  
UK 3-13 | US 4-14 | EU 36-48

Colour:  
Black Brown



- Side pull-up straps for easy donning and doffing even when wearing gloves.
- Recommended for: Construction, Mining, Manufacturing, Heavy and Light Industries, Utilities, Oil and Gas.
- Available without steel midsole in style KWD205X (Black) and KWD205CX (Brown).



# MODELS AND SPECIFICATIONS

LOW-CUT LACE SAFETY SHOE					
MODEL #	STEEL MIDSOLE	CATEGORY	STANDARD	COLOR	SOLE
KWS200	Yes	S1P	SR (EN ISO 20345:2022)	Black	Dual Density PU
KWS200X	No	S1	SR (EN ISO 20345:2022)	Black	Dual Density PU
SLIP-ON SAFETY SHOE					
MODEL #	STEEL MIDSOLE	CATEGORY	STANDARD	COLOR	SOLE
KWD207	Yes	S1P	SR (EN ISO 20345:2022)	Black	Dual Density PU
KWD207X	No	S1	SR (EN ISO 20345:2022)	Black	Dual Density PU
MID-CUT LACE SAFETY SHOE					
MODEL #	STEEL MIDSOLE	CATEGORY	STANDARD	COLOR	SOLE
KWD301	Yes	S1P	SR (EN ISO 20345:2022)	Black	Dual Density PU
KWD301X	No	S1	SR (EN ISO 20345:2022)	Black	Dual Density PU
KWD301K	Yes	S1P	SR (EN ISO 20345:2022)	Brown	Dual Density PU
KWD301KX	No	S1	SR (EN ISO 20345:2022)	Brown	Dual Density PU
ELASTIC SIDED SAFETY BOOT					
MODEL #	STEEL MIDSOLE	CATEGORY	STANDARD	COLOR	SOLE
KWD106	Yes	S1P	SR (EN ISO 20345:2022)	Black	Dual Density PU
KWD106X	No	S1	SR (EN ISO 20345:2022)	Black	Dual Density PU
ZIPPER SAFETY BOOT					
MODEL #	STEEL MIDSOLE	CATEGORY	STANDARD	COLOR	SOLE
KWD206	Yes	S1P	SR (EN ISO 20345:2022)	Black	Dual Density PU
KWD206X	No	S1	SR (EN ISO 20345:2022)	Black	Dual Density PU
RIGGER SAFETY BOOT					
MODEL #	STEEL MIDSOLE	CATEGORY	STANDARD	COLOR	SOLE
KWD205	Yes	S1P	SR (EN ISO 20345:2022)	Black	Dual Density PU
KWD205X	No	S1	SR (EN ISO 20345:2022)	Black	Dual Density PU
KWD205C	Yes	S1P	SR (EN ISO 20345:2022)	Brown	Dual Density PU
KWD205CX	No	S1	SR (EN ISO 20345:2022)	Brown	Dual Density PU

# KING'S KWX RANGE

## SOLE TECHNOLOGY



SR compliance for improved slip resistance with EN ISO 20345:2022



Deeper, more aggressive grooves for greater grip on slippery surfaces and prolonged slip resistance



Grip Zone offers enhanced grip and slip resistance on rugged terrains



Innovative outsole cleaning system with unique groove design helps expel dirt and mud that gather within the sole channels, ensuring your footwear maintains its optimal grip and performance even in demanding work environments





## DRIVER-CENTRIC STABILISER



King's innovative driver-centric stabiliser meticulously engineered into the outsole of the KWX Range is designed to prioritize comfort and control for vehicle operators. The unique curvature of the stabiliser supports foot positioning, ensuring an optimised stance that promotes heightened comfort and stability. As drivers operate their vehicles, the driver-centric stabiliser effortlessly conforms to the natural position of the foot on the pedal.

# KING'S KWX RANGE

## DUAL DENSITY POLYURETHANE FOOTWEAR

SR(EN ISO 20345:2022)



Padded ankle collar



Highly breathable 3-D lining



Improved visibility in low-light environments with orange hued shoelaces



Higher gusseted tongue minimises water and debris penetration into the shoes

Reinforced stitching



Driver-centric stabiliser ensures optimised foot positioning for heightened comfort and control while driving

King's Comfort Footbed enhances natural airflow

Enhanced outsole thickness for exceptional cushioning and comfort

Non-woven vamp lining

S3 rated, water-resistant full-grain leather upper; tough yet breathable

Steel toe cap conforming to EN ISO 20345:2022

Strong leather upper and sole bond



Water Resistant Leather



2.0-2.2mm Full Grain Leather



Puncture Resistant



Anti-Static



Slip Resistant



Self-Cleaning Sole



Mineral Oils Resistant



Organic Oils & Fats Resistant



Steel Safety Toecap



Wide Profile Toecap



Breathable Lining



Comfort Footbed



Impact Absorption



Lightweight



Toe Bumper



Strong Bonding



Driver Centric Stabilizer




# KING'S KWX RANGE

### KWX301


Mid-cut Lace Safety Boot

Size  
UK 3-13 | US 4-14 | EU 36-48

Colour:  
Black Brown



SR




- Higher gusseted tongue minimises water and debris penetration into the shoes
- Padded ankle collar provides superior ankle comfort, support, and chafing prevention.
- Recommended for: Infrastructure, Mining, Heavy Industries, Oil and Gas.
- Available without steel midsole in style KWX301X (Black) and KWX301KX (Brown).

### KWX205


Rigger Safety Boot

Size  
UK 3-13 | US 4-14 | EU 36-48

Colour:  
Black Brown



SR



- Side pull-up straps for easy donning and doffing even when wearing gloves.
- Recommended for: Infrastructure, Mining, Heavy Industries, Oil and Gas.
- Available without steel midsole in style KWX205X (Black) and KWX205CX (Brown).

# MODELS AND SPECIFICATIONS

MID-CUT LACE SAFETY BOOT					
MODEL #	STEEL MIDSOLE	CATEGORY	STANDARD	COLOR	SOLE
KWX301	Yes	S3	SR (EN ISO 20345:2022)	Black	Dual Density PU
KWX301X	No	S2	SR (EN ISO 20345:2022)	Black	Dual Density PU
KWX301K	Yes	S3	SR (EN ISO 20345:2022)	Brown	Dual Density PU
KWX301KX	No	S2	SR (EN ISO 20345:2022)	Brown	Dual Density PU
RIGGER SAFETY BOOT					
MODEL #	STEEL MIDSOLE	CATEGORY	STANDARD	COLOR	SOLE
KWX205	Yes	S3	SR (EN ISO 20345:2022)	Black	Dual Density PU
KWX205X	No	S2	SR (EN ISO 20345:2022)	Black	Dual Density PU
KWX205K	Yes	S3	SR (EN ISO 20345:2022)	Brown	Dual Density PU
KWX205KX	No	S2	SR (EN ISO 20345:2022)	Brown	Dual Density PU


# KING'S EURORANGE™

## SOLE TECHNOLOGY





Cleated sole design enhances grip for better stability on every step.



Large cleats for optimized fluid evacuation provides stronger grip and superior bending flexibility.



Marked heel offers better grip for enhanced stability, especially when walking up the stairs and climbing ladders.



Three wear-off indicators added to the sole provides an early warning on sole wear and potential loss of grip.



# KING'S EURORANGE™

## SINGLE / DUAL DENSITY POLYURETHANE FOOTWEAR



ESD compliant to  
EN 61340-4-3:2018  
(KWD202B, KWD302B)



# KING'S EURORANGE™

### KWD250B

Half-mid-cut Lace Safety Boot

Size  
UK 3-13 | US 4-14 |  
EU 36-48

Colour:  
Black

S3

- Water resistant leather half-mid-cut lace-up safety boot.
- Wide profile steel toecap for greater comfort.
- Padded ankle collar for comfort and support, and to prevent chafing.
- Dual density polyurethane (PU) sole.
- Highly breathable 3-D lining reduces skin abrasion and draws moisture from the foot.
- Recommended for: Manufacturing, General Industries, Utilities.

### 15580-BLK

Elastic Sided Safety Boot

Size  
UK 3-13 | US 4-14 |  
EU 36-48

Colour:  
Black

S1

- Leather safety boot, elastic sided.
- Wide profile steel toecap for greater comfort.
- Dual density polyurethane (PU) sole.
- Highly breathable 3-D lining reduces skin abrasion and draws moisture from the foot.
- Recommended for: Manufacturing, General Industries, Utilities.

### 15534Z-BLK

Mid-cut Lace Safety Boot

Size  
UK 3-13 | US 4-14 |  
EU 36-48

Colour:  
Black

S1

- Leather safety boot mid-cut lace-up with side-zip
- Wide profile steel toecap for greater comfort.
- Padded ankle collar for comfort and support, and to prevent chafing.
- Dual density polyurethane (PU) sole.
- Highly breathable 3-D lining reduces skin abrasion and draws moisture from the foot.
- Half sizes: From 6.5 (40) to 9.5 (44).
- Recommended for: Manufacturing, General Industries, Utilities.

### KWD202B

Low-cut Lace Safety Shoe

Size  
UK 3-13 | US 4-14 |  
EU 36-48

Colour:  
Black

S3

- Water resistant leather low-cut lace-up metal free safety shoe.
- Wide profile composite toecap for greater comfort.
- Padded ankle collar for comfort and support, and to prevent chafing.
- Dual density polyurethane (PU) sole.
- Non-metal puncture resistant material.
- ESD compliant to EN 61340-4-3:2018
- Recommended for: Manufacturing, General Industries, Utilities.

### 15532Z-WHT

Mid-cut Lace Safety Boot

Size  
UK 3-13 | US 4-14 |  
EU 36-48

Colour:  
Wheat

S1

- Leather safety boot mid-cut lace-up with side-zip.
- Wide profile steel toecap for greater comfort.
- Padded ankle collar for comfort and support, and to prevent chafing.
- Dual density polyurethane (PU) sole.
- Highly breathable 3-D lining reduces skin abrasion and draws moisture from the foot.
- Recommended for: Manufacturing, General Industries, Utilities.

### KWD302B

Mid-cut Lace Safety Boot

Size  
UK 3-13 | US 4-14 |  
EU 36-48

Colour:  
Black

S3

- Water resistant leather mid-cut lace-up metal free safety boot.
- Wide profile composite toecap for greater comfort.
- Padded ankle collar for comfort and support, and to prevent chafing.
- Dual density polyurethane (PU) sole.
- Non-metal puncture resistant material.
- ESD compliant to EN 61340-4-3:2018
- Recommended for: Manufacturing, General Industries, Utilities.



# KING'S EURORANGE™

KWS201S-S1P

S1P

Leather Sandal

Size  
UK 3-13 | US 4-14 | EU 36-48

Colour:  
Black



- Leather sandal.
- Wide profile steel toecap for greater comfort.
- Padded ankle collar for comfort and support, and to prevent chafing.
- Single density polyurethane (PU) sole.
- Recommended for: Manufacturing, General Industries, Utilities.


KWS201B-S1

S1

Low-cut Lace Safety Shoe

Size  
UK 3-13 | US 4-14 | EU 36-48

Colour:  
Black



- Perforated leather low-cut lace-up safety shoe.
- Wide profile steel toecap for greater comfort.
- Padded ankle collar for comfort and support, and to prevent chafing.
- Single density polyurethane (PU) sole.
- Recommended for: Manufacturing, General Industries, Utilities.


KWS201G-S1P

S1P

Low-cut Lace Safety Shoe

Size  
UK 3-13 | US 4-14 | EU 36-48

Colour:  
Gray



- Perforated leather low-cut lace-up safety shoe.
- Wide profile steel toecap for greater comfort.
- Padded ankle collar for comfort and support, and to prevent chafing.
- Single density polyurethane (PU) sole.
- Recommended for: Manufacturing, General Industries, Utilities.

KWD200B-S3

S3

Low-cut Lace Safety Shoe

Size  
UK 3-13 | US 4-14 | EU 36-48

Colour:  
Black



- Water resistant leather low-cut lace-up safety shoe.
- Wide profile steel toecap for greater comfort.
- Padded ankle collar for comfort and support, and to prevent chafing.
- Dual density polyurethane (PU) sole.
- Recommended for: Manufacturing, General Industries, Utilities.


KWD301B-S3

S3

Mid-cut Lace Safety Shoe

Size  
UK 3-13 | US 4-14 | EU 36-48


Colour:  
Black



- Water resistant leather mid-cut lace-up safety boot.
- Wide profile steel toecap for greater comfort.
- Padded ankle collar for comfort and support, and to prevent chafing.
- Dual density polyurethane (PU) sole.
- Recommended for: Manufacturing, General Industries, Utilities.

# MODELS AND SPECIFICATIONS

SANDALS AND PERFORATED SHOE						
MODEL #	SKU	STEEL MIDSOLE	CATEGORY	STANDARD	COLOR	SOLE
KWS201S	6250131	Yes	S1P	EN ISO 20345:2011	Black	Single Density
KWS201B	6250132	No	S1	EN ISO 20345:2011	Black	Single Density
KWS201G	6250133	Yes	S1P	EN ISO 20345:2011	Gray	Single Density
LOW-CUT LACE SAFETY SHOE						
MODEL #	SKU	STEEL MIDSOLE	CATEGORY	STANDARD	COLOR	SOLE
KWD202B	6250137	Yes (Non-metallic)	S3	EN ISO 20345:2011	Black	Dual Density PU
KWD200B	6250134	Yes	S3	EN ISO 20345:2011	Black	Dual Density PU
HALF-MID-CUT LACE SAFETY BOOT						
KWD250B	6250136	Yes	S3	EN ISO 20345:2011	Black	Dual Density PU
MID-CUT LACE SAFETY BOOT						
MODEL #	SKU	STEEL MIDSOLE	CATEGORY	STANDARD	COLOR	SOLE
KWD301B	6250135	Yes	S1P	EN ISO 20345:2011	Black	Dual Density PU
KWD302B	6250138	Yes (Non-metallic)	S1P	EN ISO 20345:2011	Black	Dual Density PU
15534Z-BLK	15534Z-BLK	No	S1	EN ISO 20345:2011	Black	Dual Density
15532Z-WHT	15532Z-WHT	No	S1	EN ISO 20345:2011	Wheat	Dual Density
ELASTIC-SIDED SAFETY BOOT						
MODEL #	SKU	STEEL MIDSOLE	CATEGORY	STANDARD	COLOR	SOLE
15580-BLK	15580-BLK	No	S1	EN ISO 20345:2011	Black	Dual Density



Tips to take care of your shoes


- Wash insole regularly to keep feet clean and healthy.
- Dry and remove excess dirt with an old toothbrush regularly to maintain fluid evacuation and slip resistance properties.
- Remove any marks using a damp cloth and soap if necessary. Polish any grain or pigmented leathers using a commercially available shoe care product.
- Store shoes in a dry, well-ventilated area after use. Keep in an area that is not subject to rapid changes in temperature and humidity levels.
- Do not soak shoes in water, machine wash, dry clean or bleach.





LEARN MORE



 [www.pip-hsp.com](http://www.pip-hsp.com)

 **King's Safety Footwear**  
**Asia Pacific Headquarters**  
Level 25, UOA Corporate Tower Lobby B  
Avenue 10, The Vertical  
59200 Bangsar South City  
Kuala Lumpur, Malaysia

 Malaysia : +60 392122024  
Singapore : +65 31577005  
Indonesia : +62 2150996843  
Philippines : +63 282312257  
Thailand : +66 1800018143  
Vietnam : +84 2844581576

King's Footwear Catalogue | 08/25  
©2025 PIP | HSP

